



## Table de cuisson Ognidove

Freestanding

Code: 5030 241



## **DETAILS**

Coloring	Black
Edge/Installation Type	Freestanding
Material	Ceramic glass
Supply	230V - 50.60 Hz
Dimensions	840x350 mm
Base size	90cm
Heating element	Three zones
Notes:	Rounded edges Supplied: Schuko electric plug
Total power	3.500 W




Left	Ø 240 mm-2.200 (3.000)* W
Centre	Ø 145 mm-1.200 (1.600)* W
Right	Ø 210 mm-1.500 (2.000)* W
Power settings	9 power settings per zone + Powerboost
Safety	Safety equipment
Туре	Induction Hob
Type of commands	Touch Control
FEATURES	
Timer	Indipendent timer from the end-of-cooking function.
Safety	All electric cooker hobs feature the most modern and sophisticated safety protections: Centralised power-off function; Child-proof safety lock; Residual heat warning lights. Induction models feature the following functions: Safety System that turn off the hob in the absence of the pot; Overflow detector that automatically turns off the plate in case of liquid overflow; Automatic deactivation to prevent accidents caused by forgetfulness.
Slider commands	The Slider control allows for extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display.
Slider commands  Pause	



Powerboost	Booster function provides increased power to the selected plate. In particular, when the Booster is activated, the plate works for ten minutes at a very high power that allows to heat quickly large quantities of water.
End-of-cooking programming	All operations are programmed by means of the touch-control on the glass itself. Each cooking plate is capable of independent programming, and thus the possibility to set different cooking times.
Smart fan system	Correct ventilation is essential for the induction hob to function in the best possible way. The Foster system automatically regulates the amount of ventilation to suit the temperatures reached.
Remote control	The ceiling suction systems and the Maya hoods are equipped with a remote control to easily activate all their functions from any position.



## **TECHNICAL DATA**

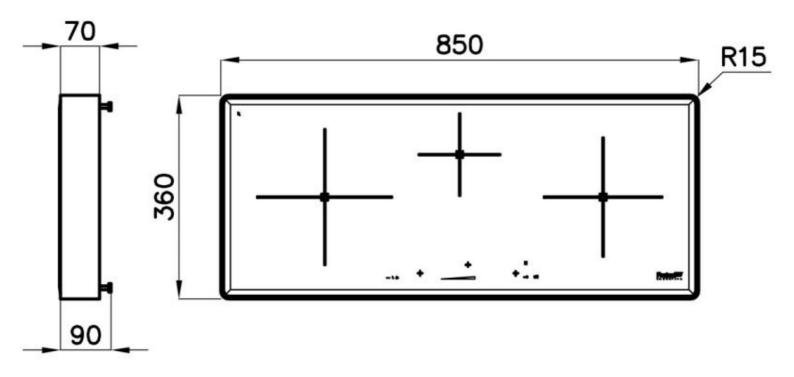



## **GALLERY**

