



# **TOUCH CONTROL 4 FOYERS CARRÉ NOIR**

**Induction Hobs** 

Code: I367 N40

TOUCH CONTROL 4 FOYERS CARRÉ NOIR



### **DETAILS**

| Coloring                      | Black  |
|-------------------------------|--|
| Edge/Installation Type        | Bevelled Edge - for flush-mount or over-mount installation           |
| Material                      | Ceramic glass  |
| Supply                        | Single-phase: 230 V; 1P + N; Two-phase 400 V; 2P + N; 50.60 Hz       |
| Compatible plate combinations | 2 zones 7361 27 * + 2 free zones (any Modular Induction plate model) |
| Dimensions                    | 275 x 150 mm   |
| Full description              | Touch Control Modular Quadra - black - for 4-zone systems            |
| Built-in hole                 | View technical data sheet  |




| Power settings             | 9 power settings per zone + Powerboost  |
|----------------------------|---|
| Туре                       | Induction Hob   |
| Type of commands           | Touch Control   |
| Notes:                     | Connection cable length: 60 cm  |
| FEATURES                   |   |
| Powerboost                 | Booster function provides increased power to the selected plate. In particular, when the Booster is activated, the plate works for ten minutes at a very high power that allows to heat quickly large quantities of water.                    |
| Pot detector               | All induction cooker hobs detect the pot resting on them, but they also calculate the area they cover. This system allows the energy to be used even more efficiently. Moreover, the plates switch off automatically when the pot is removed. |
| Smart fan system           | Correct ventilation is essential for the induction hob to function in the best possible way. The Foster system automatically regulates the amount of ventilation to suit the temperatures reached.  |
| End-of-cooking programming | All operations are programmed by means of the touch-control on the glass itself. Each cooking plate is capable of independent programming, and thus the possibility to set different cooking times.   |
| Slider commands            | The Slider control allows for extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display.  |
| Timer                      | Indipendent timer from the end-of-cooking function.   |
| Heat maintenance           | Function that allows the food to be kept warm gently (70° C), without reaching boiling temperatures or risking to burn the sauce.   |
| Go&stop function           | This device initially turns on the plates at maximum power until the selected temperature has been reached.   |



| Recall | This feature allows you to call back the last settings selected in the previous cooking.   |
|--------|--|
| Pause  | Useful function that allows you to distract your attention from cooking, interrupting and restoring the settings immediately.  |
| Safety | All electric cooker hobs feature the most modern and sophisticated safety protections: Centralised power-off function; Child-proof safety lock; Residual heat warning lights. Induction models feature the following functions: Safety System that turn off the hob in the absence of the pot; Overflow detector that automatically turns off the plate in case of liquid overflow; Automatic deactivation to prevent accidents caused by forgetfulness. |



## **TECHNICAL DATA**

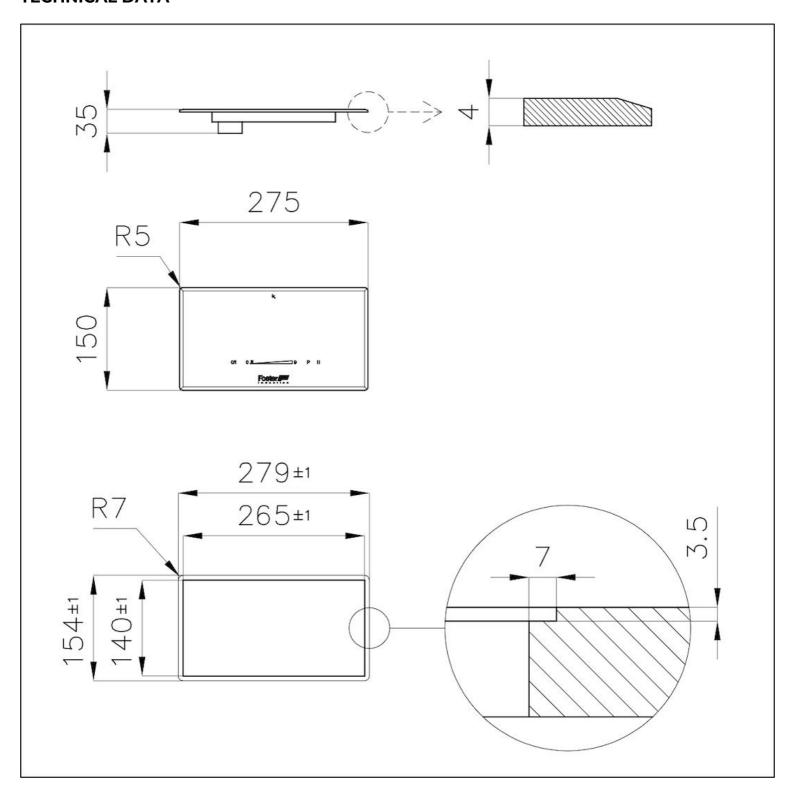



## **GALLERY**

#### of the Modular system

#### Elemento' ulceino

placing of its elements. The only limit is posed by the length of the cables which connect the different elements to the connection box: 60 cm between touch-control unit and connection box and 90 cm between cooking plates and connection box.

Combination of cooking plates
The system can be assemble
freely; some combinations the
are not possible are highlighted i
the remarks concerning the Touc
control modules

Connection box
The set-up is easy and intuitive.
The box can be placed on the wall behind the cabinet or inside it, under



### **RECOMMENDED PAIRINGS**



**CONNECTION BOX 4 FOYERS** 

1369 B40